


SPECIFICATIONS

TABLE 1. APPLIANCE DIMENSIONS

Use this table in conjunction with "Diagram 1. Dimensions" below. All dimensions in mm unless otherwise stated.		Model								
		REU-AM1220WD <i>Infinity 12</i>	REU-AM1620WD <i>Infinity 16</i>	REU-AM2024WD <i>Infinity 20</i>	REU-AM2626WD <i>Infinity 26</i>	REU-AM2626WDL <i>Infinity 26 Touch</i>	REU-A1620WB <i>B16</i>	REU-A2024WB <i>B20</i>	REU-A2626WB <i>B26</i>	MC-601Q <i>Universal</i>
A	Width	356	356	356	356	356	351	351	351	90
B	Depth	202	202	202	202	202	195	195	195	21
C	Height Unit	503	503	503	503	503	531	531	531	120
D	Height Including Brackets	571	571	571	571	571	571	571	571	-
E	Hot Water outlet (from wall)	87	87	87	87	87	87	87	87	-
F	Hot Water outlet (from centre)	105	105	105	105	105	105	105	105	-
G	Cold Water inlet (from wall)	68	68	68	68	68	68	68	68	-
H	Cold Water inlet (from centre)	10	10	10	10	10	10	10	10	-
I	Gas Connection from wall)	77	77	77	77	77	77	77	77	-
J	Gas Connection (from centre)	83	83	83	83	83	83	83	83	-
K	Gas Connection Length (from base)	40	40	40	40	40	40	40	40	-
	Cold Connection Length (from base)	50	50	50	50	50	50	50	50	-
	Hot Connection Length (from base)	39	39	41	41	41	39	41	41	-
L	Vertical Mounting Hole Centres	-	-	-	-	-	-	-	-	84
M	Cable Access Hole Size	-	-	-	-	-	-	-	-	Ø20
	Position	-	-	-	-	-	-	-	-	Centre

DIAGRAM 1. DIMENSIONS

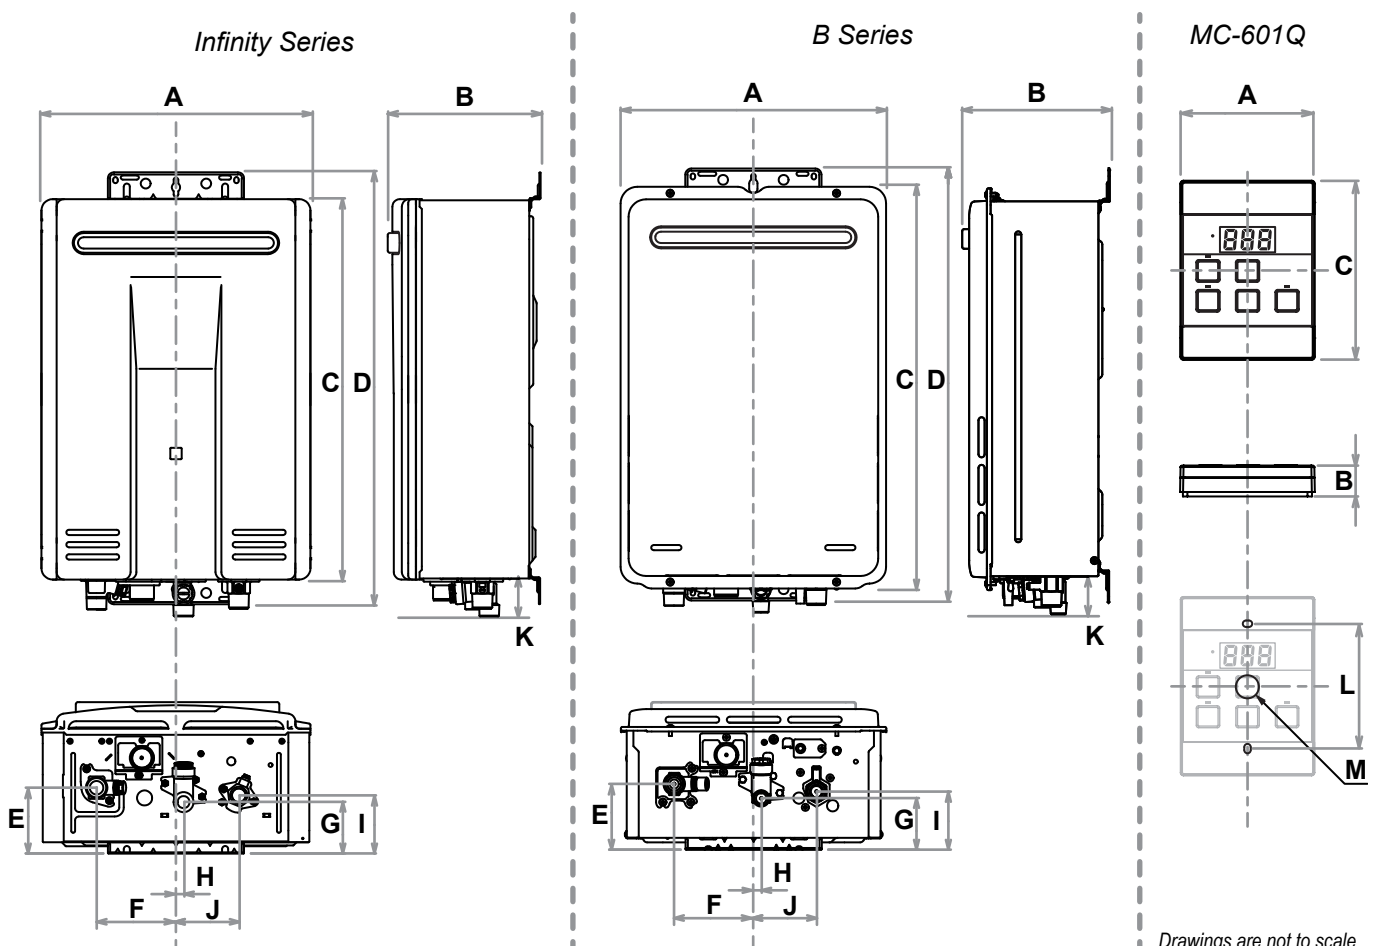

Drawings are not to scale

TABLE 2. SUPPLY, FLOW RATES, WEIGHTS & FLOW & SERVICE CONNECTIONS

Model	Gas Rate	Water Supply Pressure		Max Flow at Temp Rise (at minimum water supply pressure)				Weight	Fittings		
		Min	Max						Hot	Cold	Gas
	MJ/hr	kPa		L/min / °C				kg	(DN = mm)		
REU-AM1220WD - <i>Infinity 12</i>	92	120	1000	15 / 20	12 / 25	7.5 / 40	6 / 50	13.5	R ½ (15)	R ½ (15)	R ¾ (20)
REU-AM1620WD - <i>Infinity 16</i>	124	120	1000	20 / 20	16 / 25	10 / 40	8 / 50	13.5	R ½ (15)	R ½ (15)	R ¾ (20)
REU-AM2024WD - <i>Infinity 20</i>	156	160	1000	24 / 20	20 / 25	12.5 / 40	10 / 50	14.5	R ¾ (20)	R ¾ (20)	R ¾ (20)
REU-AM2626WD - <i>Infinity 26</i>	199	200	1000	26 / 20	26 / 25	16.3 / 40	13 / 50	15.5	R ¾ (20)	R ¾ (20)	R ¾ (20)
REU-AM2626WDL - <i>Infinity 26 Touch</i>	199	200	1000	26 / 20	26 / 25	16.3 / 40	13 / 50	15.5	R ¾ (20)	R ¾ (20)	R ¾ (20)
REU-A1620WB - <i>B16</i>	124	120	1000	20 / 20	16 / 25	10 / 40	8 / 50	13	R ½ (15)	R ½ (15)	R ¾ (20)
REU-A2024WB - <i>B20</i>	156	160	1000	24 / 20	20 / 25	12.5 / 40	10 / 50	14	R ¾ (20)	R ¾ (20)	R ¾ (20)
REU-A2626WB - <i>B26</i>	199	200	1000	26 / 20	26 / 25	16.3 / 40	13 / 50	15	R ¾ (20)	R ¾ (20)	R ¾ (20)

TABLE 3. MAXIMUM DELIVERY TEMPERATURES

- (a) Factory "Pre-Set" Maximum delivery temperature (°C)
- (b) Can the Factory "Pre-Set" Maximum delivery temperature be changed by an authorised person?

Delivery Temperature	Non - 50°C Compliant - Models								50°C Compliant - Models							
	REU-AM1220WD	REU-AM1620WD	REU-AM2024WD	REU-AM2626WD	REU-AM2626WDL	REU-A1620WB	REU-A2024WB	REU-A2626WB	REU-AM1220WD-50	REU-AM1620WD-50	REU-AM2024WD-50	REU-AM2626WD-50	REU-AM2626WDL-50	REU-A1620WB-50	REU-A2024WB-50	REU-A2626WB-50
(a)	60	60	60	60	60	60	60	60	50	50	50	50	50	50	50	50
(b)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No	No	No

TABLE 4. OTHER ACCESSORIES

Contact Rinnai for more information about our accessory range and model suitability, or visit: www.rinnai.com.au.

SMART BOX (plastic) RECESS BOX (metal)	Recess boxes are available in either plastic or metal, and are designed to permit a recessed installation of a Rinnai Continuous Flow water heater into a wall cavity, saving precious space. Recess boxes are also suitable for painting.
PIPE COVER	Pipe covers attach easily to a Rinnai Continuous Flow water heater and are designed to conceal pipes and valves. Pipe covers may also be joined to one another to conceal longer pipe work.
SECURITY CAGE	Protects the Rinnai Continuous Flow water heater from theft and damage.
SECURITY BRACKET	Prevent theft of your Rinnai Continuous Flow water heater by securing it with the custom security bracket.
SIDEWAYS FLUE DIVERTER	Designed to redirect flue products when a Rinnai Continuous Flow water heater is installed on a balcony.
WATER CONTROLLERS	An extended range of Deluxe Kitchen, Deluxe Bathroom and Wireless water controllers are also available.