# **CHEM52C9S-5**

## 90cm Canopy Rangehood | Stainless Steel





#### **Features**

Finish Stainless Steel
Installation Type Wall Mounted

Extraction Rate 760m³/h
Extraction Type Ducted
No. of Speeds 3 + turbo

Filter Type Aluminium Mesh

No. of Filters 3

Lighting Type 2W LED

No. of Lights 2

Controls Electronic Buttons - Backlit

Timer Yes

#### Accessories


Flue Extension CHEM52EXT (Optional)



# **CHEM52C9S-5**

### 90cm Canopy Rangehood | Stainless Steel



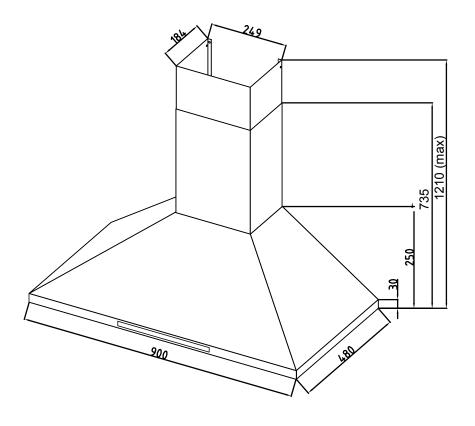

#### Installation

Cabinet Size Required 900mm

Electrical Connection 10A Plug & Lead

Power 220 - 240V, 50 / 60Hz

Motor Wattage 220W Total Wattage 224W

### Dimensions (W x H x D)

Boxed  $950 \times 540 \times 310$ mm Product  $900 \times 1210 \times 480$ mm Cut-out  $900 \times N/A \times 480$ mm

Duct 150mm

### Weight

Gross (Kg) 12.7 Net (Kg) 10.7

Install Rangehoods in accordance with the manufacturer's instructions. Technika recommends that all Rangehood clearances be a minimum of 650mm to a maximum of 750mm (between the top of the cooking surface and to the underside of the rangehood). Distance may be reduced to 600mm to align with AS/NZS 5601.1: 2013.

VERSION NO. 20241108